# INSTALLATION INSTRUCTION

For Model 73066-246 (Rev. 02/20/2014)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

**PREPARING FOR INSTALLATION (Fig. 1)**

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all parts on a clear area. Take care not to lose any small parts necessary for installation.

**CONNECTING THE WIRES (Fig. 2)**

3. Pull the black, white and ground wires out of the post.
4. While carefully supporting the fixture, connect the electrical wires as shown in Fig. 2. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post (Fig 1 & 2).

**COMPLETING THE INSTALLATION (Fig. 1)**

5. Align the lantern with the post and secure with screws (F).
6. Install 1*40W ST58 bulb (included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
7. Align glass shade (D) onto socket assembly (E).
8. Align cover (B) onto the top of glass shade (D).
9. Secure brackets (C) to top cover (B) and socket assembly (E), with ball nuts (A).

Your installation is now complete. Return the power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**Fig. 1**

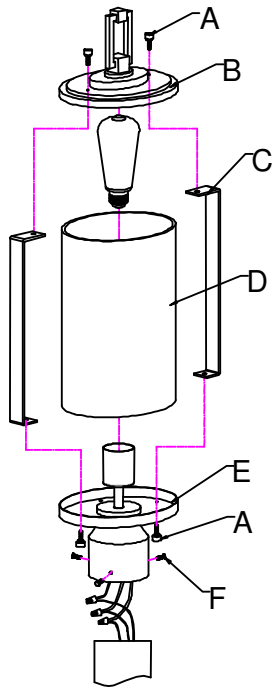

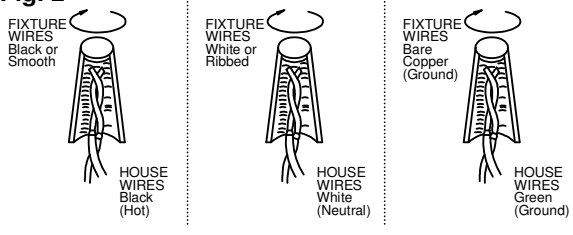
**Fig. 2**